









# Bar Manifold

## D08 (Size 22/25) Parallel Circuit Extra High Flow

**BM22PX - XX /** **5 -**

<b>Revision</b>	= XX
<b>Number of Station</b>	= 01-06
<b>Material</b>	= A
Aluminum 6061-T6, 3000 psi	
Ductile Iron <sup>1</sup> 65-45-12, 5000 psi	= D
<b>Valve Spacing 5.0"</b>	= 5

<b>Pressure Rating</b>
L = Low 3000 psi (Code 61)
H = High 6000 psi (Code 62)
Available only on SAE Flanged Ports
<b>Ports</b>
07 = SAE Flanged
12 = SAE Threaded Ports

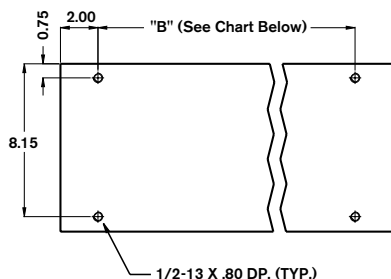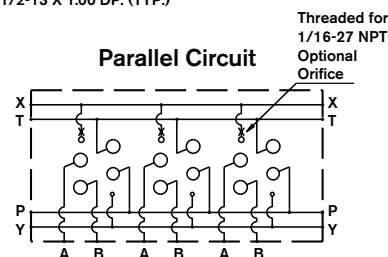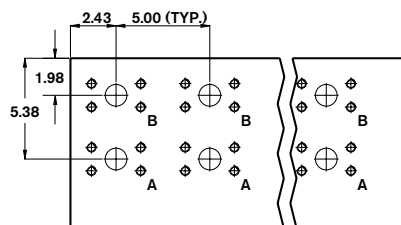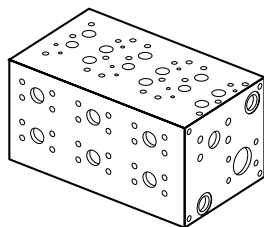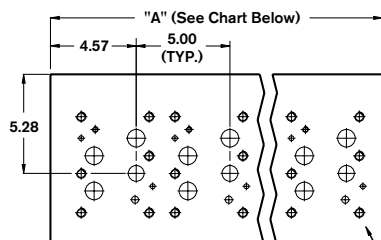

Model Code	P Port	T Port	A & B Ports	X & Y Ports
BM22...07L	1-1/2" SAE 3000 psi	2" SAE 3000 psi	1-1/4" SAE 3000 psi	SAE-12 (1-1/16-12)
BM22...07H	1-1/2" SAE 6000 psi	2" SAE 3000 psi	1-1/4" SAE 6000 psi	SAE-12 (1-1/16-12)
BM22...12	SAE-24 (1-7/8-12)	SAE-32 (2-1/2-12)	SAE-20 (1-5/8-12)	SAE-12 (1-1/16-12)

Number of Stations	01	02	03	04	05	06
Dim. "A"	6.5	11.5	16.5	21.5	26.5	31.5
Dim. "B"	2.5	7.5	12.5	17.5	22.5	27.5
Approx. Weight DI (lbs)	136	240	344	448	552	656
Approx. Weight AL (lbs)	51	90	129	168	208	247

All dimensions in inches